

LED LAMP PAR30 SERIES



Technical Specifications

Item No.	
Size	Ø95.25*112.5mm
Watts	11W 8W
Luminous Flux	806.9lm 430lm
CCT	6500K
CRI	80
Voltage	120V
Beam Angle	30°
PF	≥0.85
Certification	UL/FCC
Base	E26
Lifespan	35000hrs




Features


This revolutionary product adopts the latest technology replacing traditional bulbs with energy-efficient LEDs. Widely used in the lighting of homes, hotels, offices and other commercial spaces, these fixtures are suitable for a variety of applications, and will reduce energy bills to provide significant energy savings.



Dimensions (mm)

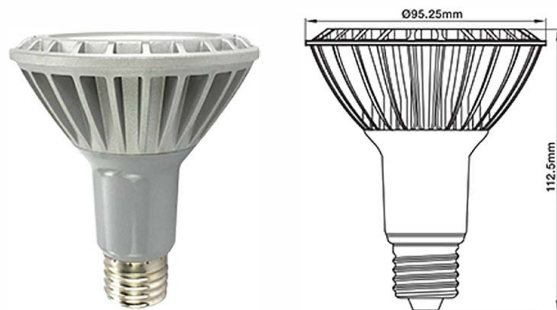

Luminance Intensity Distribution

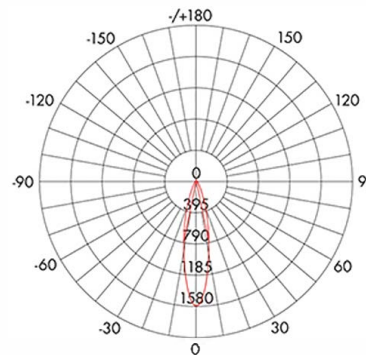

Caution

- ⊙ Risk of electric shock. Do not tamper with lamp. Turn power off before inspection, installation or removed.
- ⊙ Suitable for use in wet locations when used in an outdoor-rated fixture. However, do not use where directly exposed to water or weather.
- ⊙ Suitable for open air fixtures (luminaire), but not intended for use in totally enclosed fixtures.
- ⊙ Not intended for use with emergency exit fixtures or emergency exit lights.
- ⊙ Only use in a fixture that can structurally support a lamp weighing 0.13lb. Added weight may cause instability of a free standing luminaire.
- ⊙ To prevent early failure, lamp should be installed in an operating environment ranging from -4°F/-20°C and +95°F/+35°C.
- ⊙ Use only on 120VAC-60Hz circuits.